


# 904 BROADBAND AMPLIFIERS

## AMPLIFIER 3X-UHF-BIII-BI/FM EVEREST

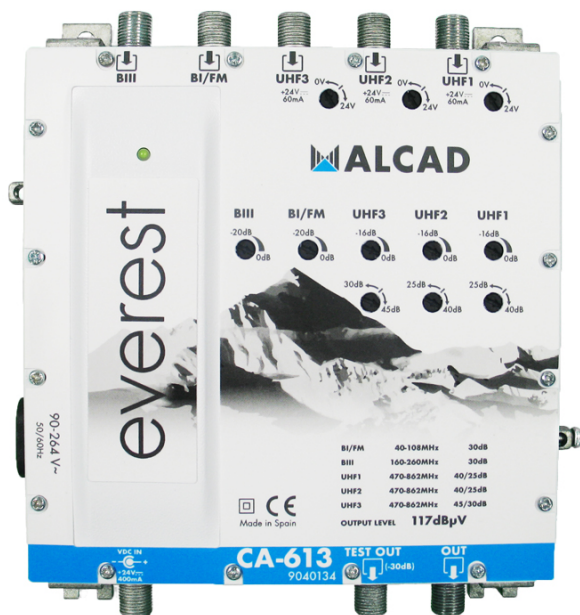

Code : **9040134**

Model : **CA-613**

### Description

Broadband amplifier for head-end, with five inputs and different frequency configurations. The built-in power supply unit can feed a preamplifiers by means of a switch. Optional external power supply for redundant power. Output test-point to adjust the installation without having to disconnect the TV signal.

### Applications

Large-scale digital and analogue MATV installations. Suitable for installations where the channels of each band are received at similar levels. Adjustment by means of switches and regulators which control the gain at each input.

### Characteristics

Made from zamak and galvanised steel plate to provide maximum shielding. Input and output connectors in the opposite sides to facilitate installation. F-type connectors.

CODE	9040134					
MODEL	CA-613					
Number of inputs/outputs/test	5 / 1 / 1					
Frequency range	Band	UHF	UHF2	UHF3	BIII/DAB	BI/FM
	MHz	470-862			160-260	47-108
Gain	dB $\pm$ TOL	40/25 $\pm$ 1,0 <small>Switchable</small>		45/30 $\pm$ 1,0 <small>Switchable</small>		32 $\pm$ 1,0
Gain adjustment	dB	16			20	
Output level	dB $\mu$ V	117 DIN 45004B 114 (IMD <sub>3</sub> -60 dB) 107 (IMD <sub>2</sub> -60 dB)				
Noise figure	dB	12 $\pm$ 1,0		7 $\pm$ 1,0		8 $\pm$ 1,0
Output voltage	Vdc	24				
	mA	60				
Mains voltage	Vac	99-264				
	W	11,7				
External voltage	Vdc	24				
	mA	410				
Operating temperature	°C	-10 ... +65				
Protection index		IP 20				